

MAKE SAVINGS

+ Time

Increase productivity by minimizing the time spent managing your waste.

+ Space

Give yourself more space without expanding your building. Reducing the volume of boxed packaging frees up storage space.

+ Economy

Give more value to your waste to optimize its sale. Minimize your waste collect costs by reducing the transport of your waste.



Ease of use
100% Secure

CO2 Reducer

The



of 5.1

- + Quick and easy to use
- + Very small floor space requirement
- + Quick and easy installation
- + Simple operating control and presence of automatic indicator
- + Manufacture adaptable to your work environment
- + Very significant reduction of the volume
- + High resistance over time

Technical characteristics

Lenght	879 mm
Width	376 mm
Total height	1 049 mm
Open door depth dimension	833 mm
Power	1.1kW - 230 Single phase - 6A
Poids	220 kg
Compaction force	1,5 tons
Machine foot support type	Fixed as standard or D80 casters (optional)
Capacity, flow	300 canned food per hour

Available in semi-automatic version

Waste type




Canned food

Further information

- CE Certification and maintenance manual
- Fully stainless steel frame
- 4 casters: 2 fixed and 2 equipped with brakes (optional)
- Electrical safety
- Hydraulical safety
- Delivered with 2m of 3G1.5 square cable
- 1 curve circuit breaker D - 20A to be provided on the electrical supply of the place of installation (at the customer's expense)

DRAWINGS :

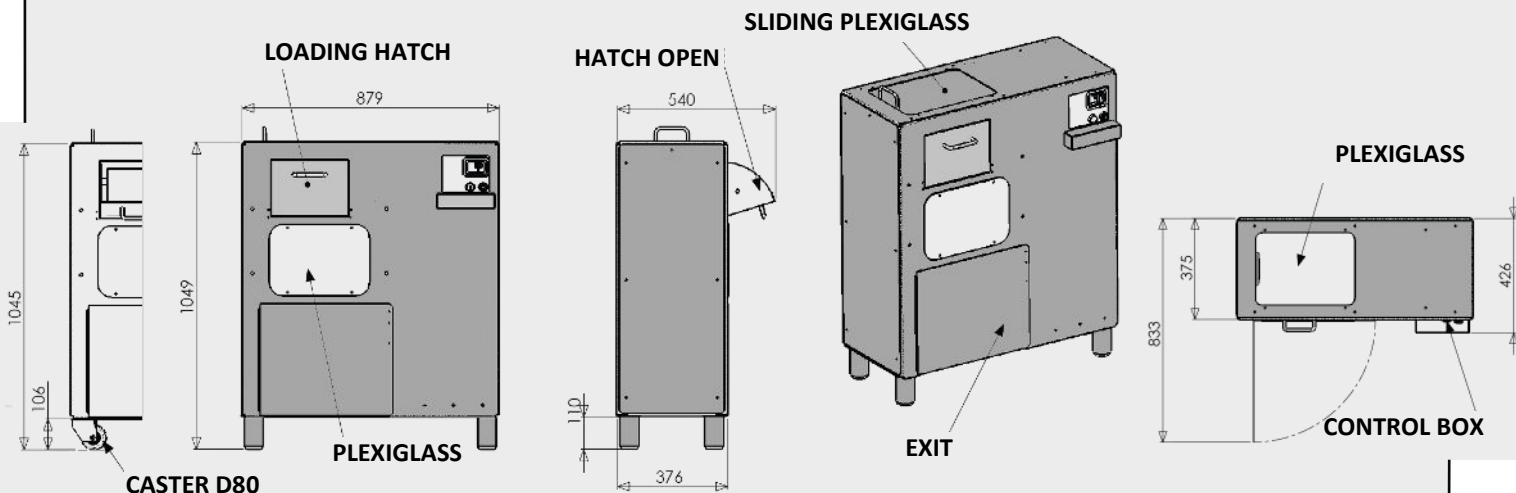

The manufacturer can modify the characteristics at any time